



## DATA SHEET

### residual current circuit-breaker

#### DFS 4 125-2/0,03-B NK HD

AC/DC sensitive type B, fire protection according to VDE 0100-420, for harsh environments

Article number 09174695HD



#### Function

Residual current circuit-breakers (RCCBs) are components for implementing protective measure "Automatic disconnection of the power supply" as per VDE 0100 part 410 or corresponding international installation regulations. In spite of the compact dimensions, a number of different tripping currents and characteristics are available at rated currents, depending on the design, up to 125 A. They also have large two-tier terminals for large conductor cross-sections, a practical multi-functional switch toggle and can be provided with labels using free-of-charge software. Type B residual current circuit-breakers detect smooth DC residual currents and all other residual currents at frequencies up to 150,000 Hz. The operating voltage required for this is taken from the mains supply. Correct power supply is ensured when the voltage between the mains conductors is  $\geq 50$  V. Pulsating and AC residual currents are detected independent of the mains voltage. For residual current circuit-breakers with characteristic curve NK, the tripping current frequency response runs below human tolerance levels for shock currents with different frequencies. For RCCBs with a rated residual current of 30 mA, extensive personal safety is achieved even with residual currents above the rated frequency. With an upper tripping threshold of 300 mA at frequencies up to 150 kHz, significantly more sensitive and wider-reaching protection from earth leakage currents is provided compared to characteristics B SK and B+. As a result, extensive fire protection is also possible even with electronic equipment with high clock frequencies. The wide scope of protection thanks to the NK characteristic requires the monitored system to be set up with low leakage currents. Devices in the standard design are intended for monitoring circuits with a rated voltage of 230 V and a rated frequency of 50 Hz. With an airtight, encapsulated tripping mechanism from a special alloy and the stainless steel latch, residual current circuit-breakers in HD design are protected, in particular from corrosion, corrosive gases, moisture and extreme temperature fluctuations.

#### Features

AC/DC sensitive for residual currents with frequencies and mixed frequencies of 0 Hz (smooth direct current) up to 150 kHz, high availability even of voltage-independent detection of smooth DC residual current and AC residual current with frequencies not equal to 50/60 Hz thanks to full functional compatibility with mains voltages from at least 50 V AC on any two active conductors, mains-voltage-independent tripping when type A residual currents occur, compact design for all rated currents, high short-circuit resistance, double-sided two-tier terminals for large conductor cross-section and busbar, switch position indicator, viewing window for labels, multifunction switch toggle with three positions: "on", "off" and "tripped", Neutral conductor position right

#### Mounting

quick fastening to mounting rail, any installation position, supply preferably from above

#### Applications

Commercial and industrial installations with TT, TN-S and TN-C-S systems, where power electronics equipment is used without galvanic isolation from the mains, e.g. frequency converters, switching power supplies, high-frequency converters, photovoltaic installations and UPS equipment with frequency converters without transformers, Facilities at risk of fire

#### Notes

suitable for use in 50 Hz AC networks, RCCBs for other frequencies available upon request, Not designed for use in direct current networks or on the output side of controlled electrical equipment such as frequency converters.

#### Accessories

automatic reclosing devices DFA, terminal caps KA, information stickers HAS, auxiliary switches DHi, restart locks DFS WES, software DBS

#### Technical Data

| Technical Data  | DFS 4 125-2/0,03-B NK HD |
|-----------------|--------------------------|
| Series          | DFS 4 B NK HD            |
| Number of poles | 2                        |

Subject to technical changes

| Technical Data  | DFS 4 125-2/0,03-B NK HD  |
|---|---|
| Residual current type                                   | B   |
| Tripping characteristic curve                           | NK  |
| Rated current (AC)                                      | 125 A   |
| Rated residual current $I_{\Delta n}$                   | 0.03 A  |
| Short-time delayed                                      | true  |
| Selective   | false   |
| min. Operating voltage range of test circuit            | 150 V   |
| max. Operating voltage range of test circuit            | 250 V   |
| Minimum rated operating voltage (Type A/AC operation)   | 0 V AC  |
| Minimum rated operating voltage (Type B operation)      | 50 V AC   |
| Non-trip time   | 10 ms   |
| Tripping frequency                                      | 0 Hz ... 150 kHz  |
| Maximum disconnection times                             | $1 \cdot I_{\Delta n} \leq 300 \text{ ms}$ ; $5 \cdot I_{\Delta n} \leq 40 \text{ ms}$                  |
| Internal consumption                                    | max. 2.2 W  |
|   | <b>load circuit</b>   |
| Specification   | load disconnect contact   |
| min. Contact opening                                    | 4 mm  |
| Rated voltage (AC)                                      | 230 V   |
| Rated current (AC)                                      | 125 A   |
| Rated short-circuit current                             | 10 kA   |
| Surge current strength                                  | 3 kA  |
| max. Total rated switching capacity                     | 1250 A  |
| Rated insulation voltage                                | 400 V   |
| Rated impulse withstand voltage                         | 4 kV  |
| Rated frequency   | 50 Hz   |
| Current heat loss per current path                      | 11.2 W  |
| Thermal Backup-fuse OCPD                                | 80 A  |
| Short-circuit backup-fuse SCPD                          | 125 A   |
| Back-up fuse type                                       | gG  |
|   | <b>screw-type terminal top and bottom (load circuit)</b>  |
| Neutral conductor position                              | right   |
| Protection against direct contact                       | DGUV V3, VDE 0660-514, finger and back-of-hand proof  |
| Connection C1 Maximum number of conductors per terminal | 2 (conductors of same type and cross-section)   |
| Cross section solid                                     | 1-wire: 1.5 mm <sup>2</sup> ... 50 mm <sup>2</sup> ; 2-wire: 1.5 mm <sup>2</sup> ... 16 mm <sup>2</sup> |
| Connecting capacity flexible                            | 1-wire: 1.5 mm <sup>2</sup> ... 50 mm <sup>2</sup> ; 2-wire: 1.5 mm <sup>2</sup> ... 16 mm <sup>2</sup> |
| Cross section stranded                                  | 1-wire: 1.5 mm <sup>2</sup> ... 50 mm <sup>2</sup> ; 2-wire: 1.5 mm <sup>2</sup> ... 16 mm <sup>2</sup> |
| Cross section AWG, solid                                | 15 ... 1  |
| Cross section AWG, stranded                             | 15 ... 1  |
| Cross section AWG, flexible                             | 15 ... 1  |
| Cross section AWG, flexible with ferrule                | 15 ... 1  |
| Tightening torque                                       | 2.5 Nm ... 3 Nm   |
|   | <b>General data</b>   |
| Operating position                                      | optional  |

Subject to technical changes


| Technical Data                    | DFS 4 125-2/0,03-B NK HD   |
|-----------------------------------|--|
| max. Operating altitude above MSL | 2000 m   |
| Mechanical endurance              | min. 5000 cycles   |
| Electrical endurance              | min. 2000 cycles   |
| Surrounding atmosphere            | harsh environmental conditions   |
| Storage temperature               | -35 °C ... 75 °C   |
| Ambient temperature               | -25 °C ... 60 °C   |
| Climate resistance                | according to IEC 60068-2-30: humid heat / cyclic (25 °C / 55 °C; 93 % / 97 % RH)   |
| Shock resistance                  | 20 g / 20 ms Duration  |
| Fatigue limit                     | > 5 g (f ≤ 80 Hz, duration > 30 min.)  |
| Housing type                      | distribution board housing   |
| Installation type                 | Mounting rail (35 mm)  |
| Housing material                  | thermoplastic  |
| Protection class                  | IP20 (installed: IP40)   |
| sealable                          | true   |
| Width                             | 72 mm  |
| Height                            | 85 mm  |
| Depth                             | 75 mm  |
| Installation depth                | 69 mm  |
| Module widths                     | 4  |
| Weight                            | 0.407 kg   |
| Design requirements/Standards     | VDE 0664-10, VDE 0664-40, VDE 0664-400, ÖVE/ÖNORM E 8601, DIN EN 61008-1, EN 62423 |
| Degree of pollution               | 2  |
| Certifications                    | VDE  |

**Dimensions**




Dimensional drawing Group view

**Wiring example**



Wiring diagram

**Diagrams**

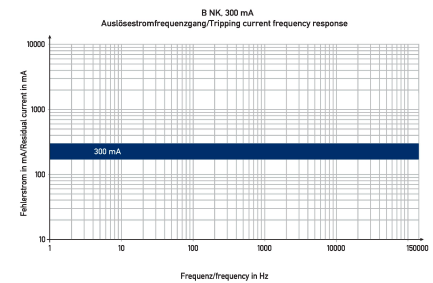

Characteristic B NK 300 mA

Subject to technical changes